



# HBB-16M

Traditional High Bay,  
Metal Refractor

**4,000 to 20,000 Lumens**

*Traditional high bay form with metal refractor to maximize downlight with no uplight.*

**MECHANICAL**

- Dimensions: 16.4" wide, 18.9" high
- Hook, 6" stem, pendant and cable mounting options
- Metal refractor

**OPTICAL**

- Multiple distribution options, including narrow, medium and wide
- Reflector Exterior Color Options: Natural Aluminum, White, Black, Bronze or Custom with the RAL number.

**ELECTRICAL**

- Standard with 0-10V dimming to 20%
- 120/277 voltage
- Power supply is overload and short circuit protected

**PERFORMANCE**

- 4,000 to 20,000 delivered lumens for variety of applications
- CCT: 3000K, 3500K, 4000K at 80+ CRI (90 CRI option)
- LED COB module L70 rated lifetimes of at least 50,000 hours


**LISTINGS**

- ETL Listed
- Suitable for damp location

Consult factory for alternative configurations. | 5 year limited warranty.

Dimension and specifications in literature subject to change.

Type	Job Ref.
------	----------

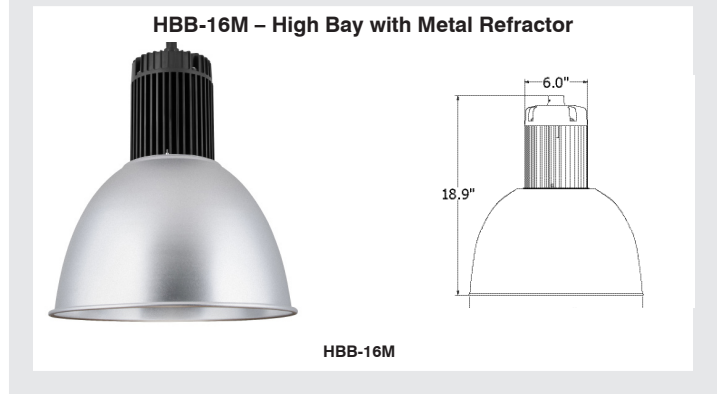

**DIMENSIONS**

	A Height	B Heat Sink Width	C Driver Width
4,000-6,000 lumens	8	6	5
8,000-16,000 lumens	8	6	6
20,000 lumens	10	6	6

**MOUNTING OPTIONS**

See the HBB Mounting Options sheet for more details.

HBB-16M														
	DELIVERED LUMENS @ 35K		DISTRIBUTION		COLOR TEMPERATURE		CRI	REFRACTOR	REFLECTOR EXTERIOR COLOR	MOUNTING	VOLTAGE			
<b>16" High Bay with Metal Refractor</b>	-40	4155 lumens	-DX	No Optical Lens (85°)	-30K	3000K	-80	-0 16" Metal, Open	-NA	Natural Aluminum	-HK	Hook 6" Stem Mount Pendant _____" * Cable w/ straight cord. Adj. 2'-10'	-120/277	
	-60	6233 lumens	-D25	25° Fresnel Lens	-35K	3500K	-90		-WH	White	-ST			
	-80	8103 lumens	-D60	60° Optical Lens (65°)	-40K	4000K			-BK	Black	-PND-HBB			
	-100	10128 lumens							-BZ	Bronze	-CAB-C-10			
	-120	11998 lumens							-RAL	# _____ - Custom				
	-160	15893 lumens												
	-200	19166 lumens												

\*Specify Pendant Length (e.g. -PND24)



**HBB-16M**



# HBB-16M

Traditional High Bay, Metal Refractor

## PHOTOMETRY


HBB-16M-160-DX , Report No: CRT1901221033-001+002-003, 01/22/2019, 15,743 delivered lumens, 131 input watts, 120.18 lm/W, 3500K, 80 CRI

### ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0-30	11,628.7	73.9%
0-40	15,131.4	96.1%
0-60	15,723.2	99.9%
60-90	19.7	0.1%
70-100	0	0%
90-120	0	0%
0-90	15,742.9	100%
90-180	0	0%
0-180	15,742.9	100%

### CONE OF LIGHT

Initial Nadir Footcandles

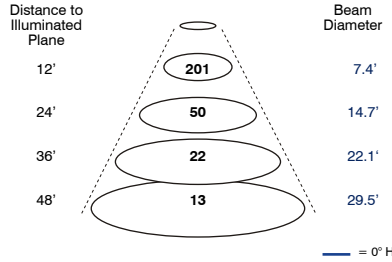

### CANDLEPOWER DISTRIBUTION CURVE



### PERFORMANCE DATA

Model	Input Watts	Delivered Lumens	Efficacy (lm/W)
HBB-16M-60-DX	45	5,918	132
HBB-16M-80-DX	64	7,931	124
HBB-16M-100-DX	71	9,825	138
HBB-16M-120-DX	97	11,837	122
HBB-16M-160-DX	131	15,743	120
HBB-16M-200-DX	164	19,768	121

### COLOR TEMPERATURE CONVERSIONS

Peachtree performance data is presented as delivered lumens. Standard photometric test data is based on 3500K CT and 80 CRI.

For other CCTs and CRIs, use the following conversion factors:

CCT/CRI	Conversion Factor
3000K at 80 CRI	0.99
3000K at 90 CRI	0.81
3500K at 80 CRI	1.00
3500K at 90 CRI	0.83
4000K at 80 CRI	1.01
4000K at 90 CRI	0.86
5000K at 80 CRI	1.04
5000K at 90 CRI	0.89