

Type	Job. Ref.
------	-----------



POD

12" x 2.5" Shallow LED
Cylinder / Sconce
8" Aperture

1200 and 1800 Lumens

PRODUCT SPECIFICATION DATA

MECHANICAL

Powder Coated Spun .063 Aluminum Cylinder
Finish exceeds 1000 hr. ASTM salt spray
Flush mount lens
Surface mount only

ELECTRICAL

120v only,
Triac Dimming

WALL MOUNT

Not recommended for mounting in direct line of sight

PERFORMANCE


CCT: 3000K @ 80+ CRI
70% lumen maintenance at 50,000 hours based on
IESNA LM-79-2008.

Electrical components UL 8750 recognized

5 Year limited warranty.



Dimensions and specifications in this literature are subject to change.

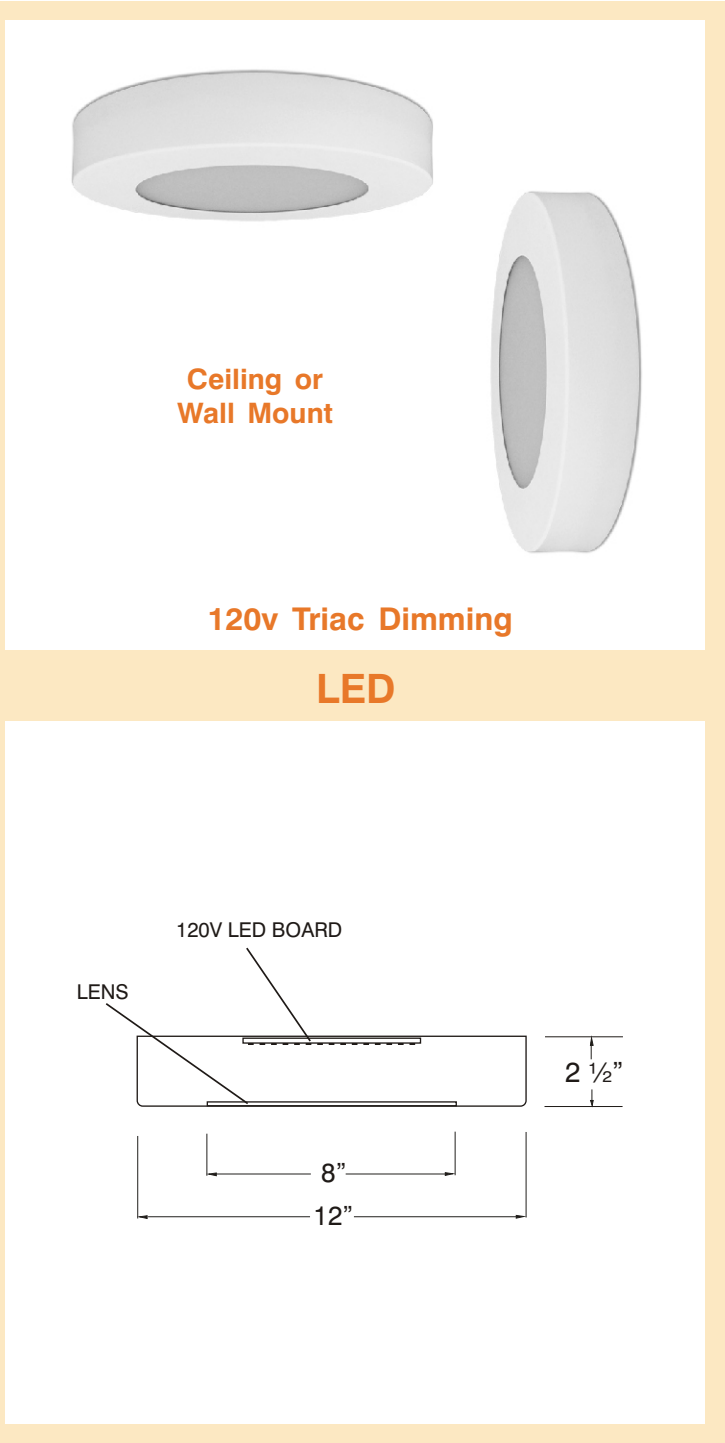

	DELIVERED LUMENS at 30k	POWDER COAT FINISH
POD		
12" x 2.5" LED 120v AC Shallow Round Ceiling or Wall Mount Triac Dimming	-18 1799 -12 1259	-WH Matte White -BK Matte Black -AN Natural -BZ Bronze -RAL # ____



© 2017 Peachtree Lighting LLC

770-787-8490 • www.peachtreelighting.com

POD



POD

12" x 2.5" Shallow LED Cylinder
8" Aperture


POD-18-30K




Test No: CRT1702101119-001
 Source: AC Module
 Color Temp: 3000K
 Total Fixture Lumens: 1799
 S/MH: 1.2

Input Current
 Voltage: Watts: Amps:
 120 35 .29

CANDLEPOWER DISTRIBUTION CURVE

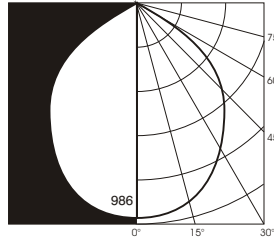

CONE OF LIGHT

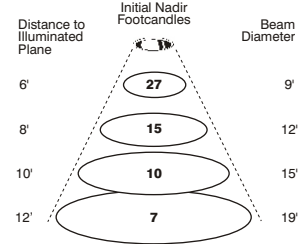


POD-12-30K



Test No: CRT1702101119-001 (calc)
 Source: AC Module
 Color Temp: 3000K
 Total Fixture Lumens: 1259
 S/MH: 1.2

Input Current
 Voltage: Watts: Amps:
 120 25 .21

CANDLEPOWER DISTRIBUTION CURVE

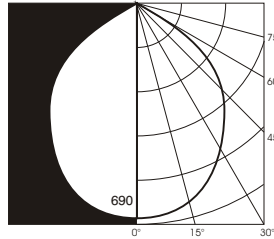

CONE OF LIGHT

